

108 Bench

Enric Batlle, Joan Roig, 2007

Urbidermis



Materials

Bench made from architectural concrete painted in white or grey with waterproof exposed aggregate finish.
Optional anti-icing with waterproof or anti graffiti without waterproofing treatment.

Installation and maintenance

Surface fixation by means of two anchor bolts sunk into holes previously drilled into the pavement and filled with epoxy resin, quicksetting cement or similar. Delivered packaged. Instructions are included. No functional maintenance is required.

For further information log onto urbidermis.com

Standards

UNE-EN 13369, UNE-EN13198, UNE EN 771-3, UNE 7178, UNE 146507, UNE-EN 12390-3, UNE-EN 12504-1, EHE 08

Finishes



White



Grey

*The colours shown are merely indicative and may differ from reality. (Other colours available to order)

**Consult finishes for marine environments.

Weights kg [lb] (unpacked)

0,48 m 108 bench without backrest: 212 [467.38]

0,48 m 108 bench with backrest: 400 [881.85]

1,50 m 108 bench without backrest: 644 [1419.78]

1,50 m 108 bench with backrest: 1232 [2716.095]

1,50 m 108 tier: 423 [932.56]

1,50 m trimmed: 1060 [2336.9]

1,50 m barrier: 910 [2006.21]

1,50 m low wall barrier: 734 [1618.19]

1,20 m high step: 346 [762.80]

1,20 m low step: 173 [381.4]


108 without backrest inner angle of 108°: -

108 without backrest outer angle of 108°: -

108 Bench

Enric Batlle, Joan Roig, 2007

Urbidermis

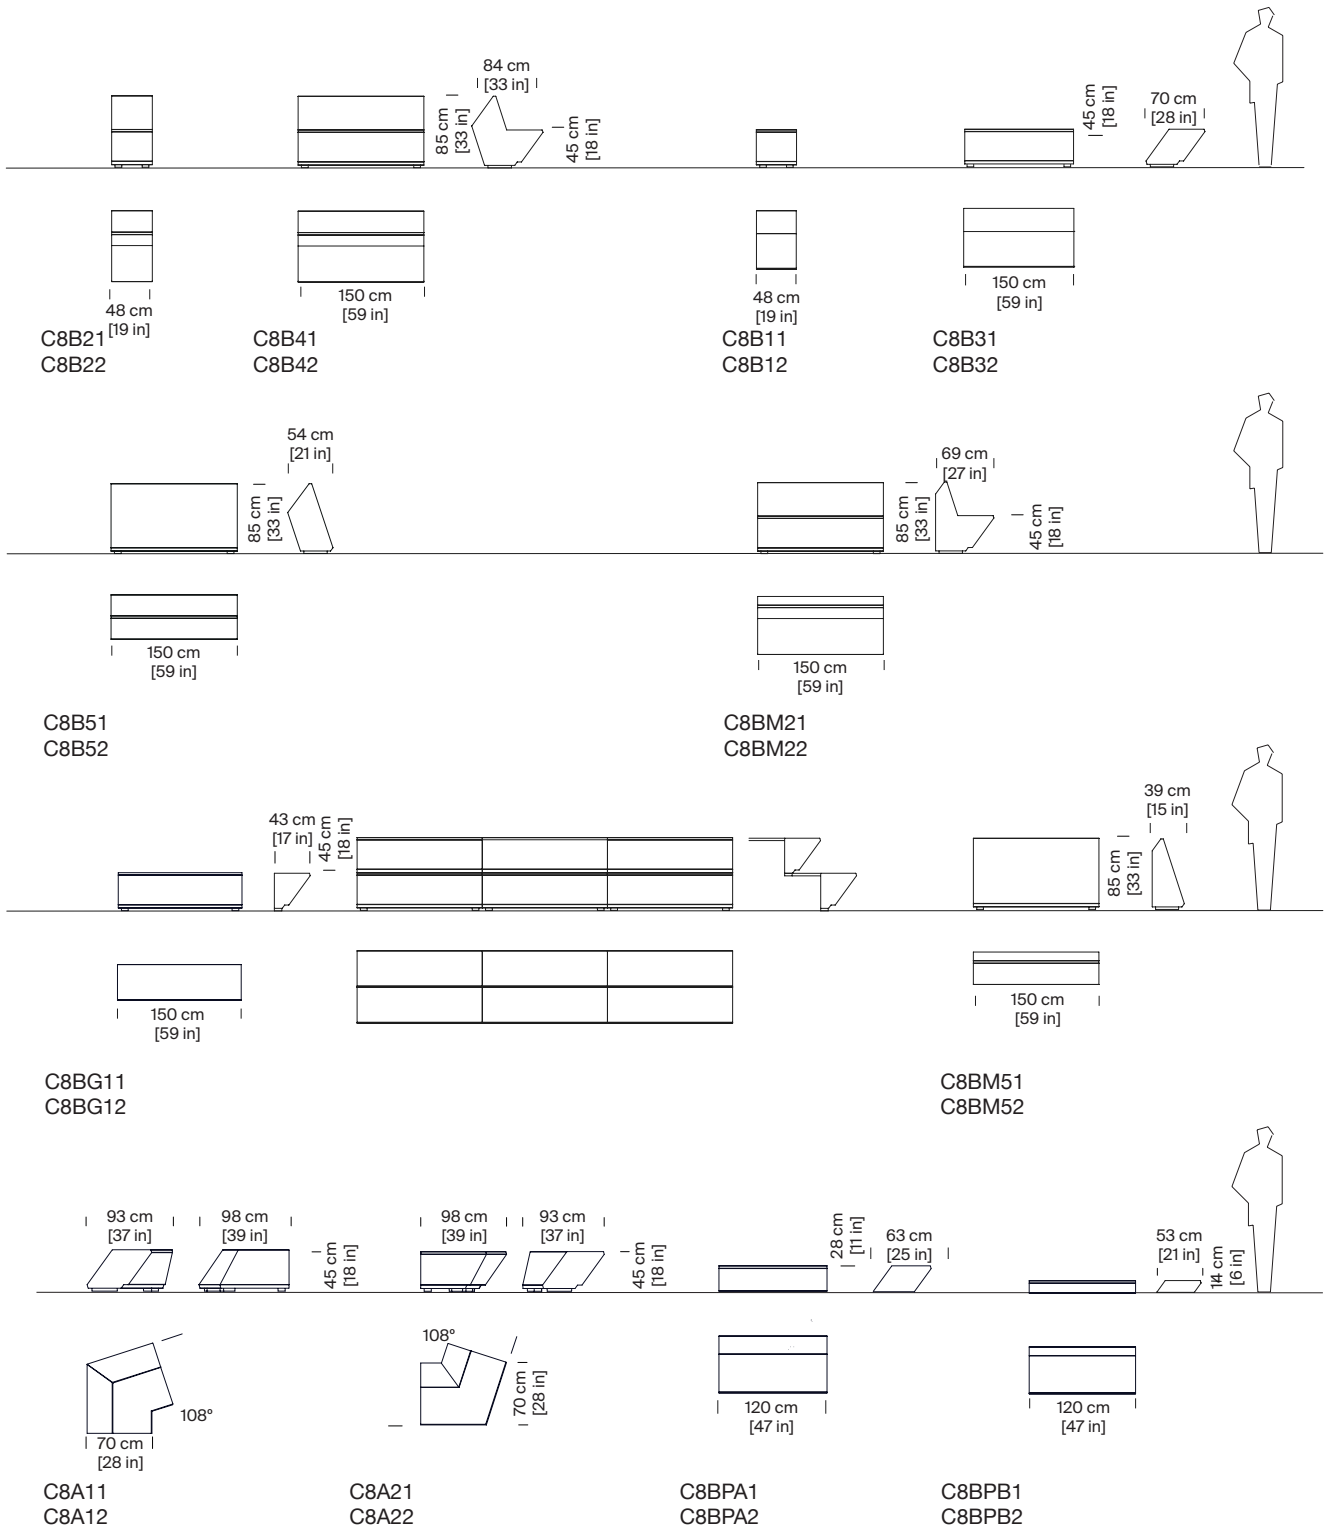

Headquarters Parc de Belloch
Ctra. C-251, Km 5,6
E-08430 La Roca (Barcelona, Spain)
+34 938 619 100

Warehouse
Carrer del Fou, Polígono Industrial Sud
E-08440 Cardedeu (Barcelona, Spain)
+34 938 619 182



Sistema de Gestión
ISO 9001:2015
ISO 14001:2015
www.urb.com
© 2000/2021